


# CLEANTECH 400

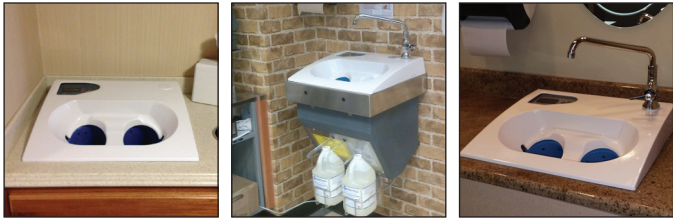

## CleanTech 400 Features

A dual option machine ideal for use in healthcare, restrooms, kitchens or food production facilities in which automated hand hygiene is implemented, but a manual faucet may still be needed.

- Deep cylinders to wash up to elbows
- Optional faucet for debris removal
- Foot pedal or auto faucet options

## Dimensions

In-counter: 21" width x 19" depth x 29 1/4" height

Wall Mount: 21 1/4" width x 22" depth x 36 3/8" height

## Weight

55 lbs. (varies with options)

## Shipping Weight

65 lbs. (varies with options)

## Cycle and Activation

Automatic, via infrared photo-optical sensor  
12-second wash and rinse cycle

## Handwash Compliance Monitor

Counts number of handwash cycles  
Optional resettable counter

## Water Consumption

0.6 gallons per wash cycle

## Electrical

100-250 VAC, 50/60 Hz, 300 W

## Plumbing

2 each, 3/4" male hose, hot and cold minimum 4 GPM,  
40-80 PSI, 60 PSI optimum

## Drain

Standard 1 1/5" drain stub

P-Trap to be supplied by facility

Ideal drain height 18-22" from floor

## Solutions Storage

2 – One gallon containers of Hand Soap

## Solutions

Required solutions provided by Meritech  
(Other solutions will void warranty)

## Options

In-Counter Configuration Standard

Wall mount bracket

Lockable Solutions Enclosure

Manual Faucet/Auto Faucet

Foot Pedal Faucet

Stainless Steel Table

Prison mount option



meritech.com • 800.932.7707

CleanTech Automated Handwashing and Bootwashing Systems are protected by the following U.S. Patents: U.S. Patent #5,265,628; #5,823,447; #7,607,442; #7,607,443; #7,617,830; #7,641,740; #7,659,824; #7,682,464; #7,698,770; #7,754,021; #7,754,022; #7,757,700; #7,758,701; other patents pending.